
Double Door - Four FrameFrog KitModel No: FRG2L2S-001

EH4 - Electric Hinge

EPT4 - Electric Power Transfer

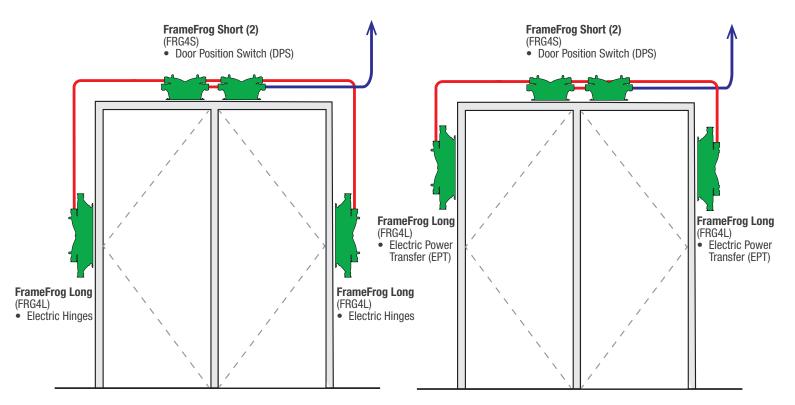

Conduit from FrameFrogs to the ceiling Conduit connecting FrameFrogs within frame

Recommended Frame Preparation

- Electric Hinge Prep at Center Hinge (3/4" Hole for wires)
- 4.875" x 1.25" DPS Prep in Head with flush cover plate
- Standard Strike Prep on Center Mullion
- For frames WITHOUT a Center Mullion, coordinate location of DPS with Strike Plates in the head
- Omit metal back box (mortar and dust boxes) wherever FrameFrog is installed

Implications for this Layout

- Committed to Electric Hinge for powering the lock
- EPT is not an option
- Adds cost of DPS prep only
- Card Readers and other devices will likely be wall mounted adjacent to the opening

Recommended Frame Preparation

- 9" Long EPT Prep between hinges
- 4.875" x 1.25" DPS Prep in Head with flush cover plate
- Standard Strike Prep on Center Mullion
- For frames WITHOUT a Center Mullion, coordinate location of DPS with Strike Plates in the head
- Omit metal back box (mortar and dust boxes) wherever FrameFrog is installed

Implications for this Layout

- Committed to EPT for powering the lock
- Electric Hinge is not an option
- Adds cost of DPS and EPT prep
- Card Readers and other devices will likely be wall mounted adjacent to the opening







FrameFrog Long FRG4L	2	
FrameFrog Short FRG4S	2	
1/2" PVC Conduit - 40" Long	4	
1/2" PVC Sweep elbows - 4" R	2	
Mounting tabs (FrameFrog Short)	8	
PVC connectors	2	
1/2" EMT connector	1	
3/4" EMT connector	1	
Threaded 1/2" PVC Connector	1	
QR code door labels	1	回旋回 强调器 可能器 FRAME FROG

2023.2

Common Configurations