
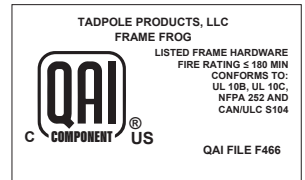


INSTALLATION GUIDE

FrameFrog 4 Port - 9" Opening

Model : FRG4L-001

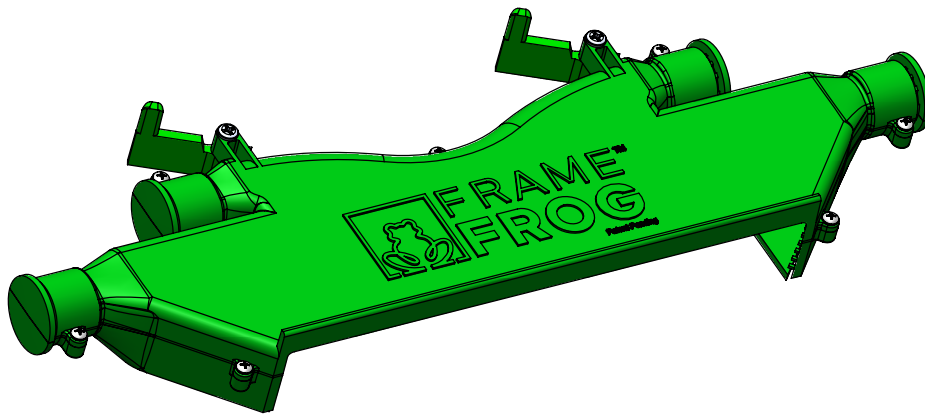


Get your
Instructions
Online.




SCAN ME

FrameFrog Parts Diagram

- A – Port A
- B – Port B
- C – Wing Tab
- D – Screw
- E – Port Caps
- F – Knockouts

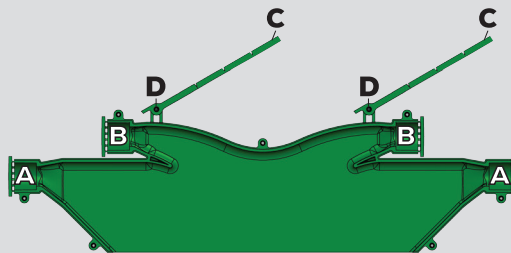


FRONT

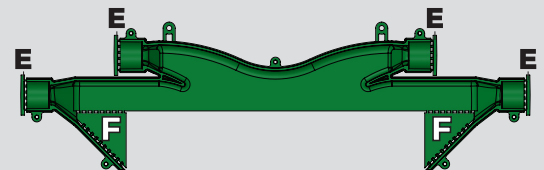


BACK

Preparing Door Frame

1. Provide FrameFrog where electric door hardware devices are to be installed or are planned in the future.
2. Omit mortar boxes from door frame supplier where ever FrameFrog is to be installed. FrameFrog replaces the mortar box.
3. Hollow metal door frame supplier should supply wire frame type anchors for masonry frames and flush Z type anchors (notched) for drywall frames in order to provide clearance for conduits. T anchors and other shapes will conflict with the installation of conduit that is housed within the frame.




Wire Anchor




Cut notch for
clearance as
needed.

Flush Z





Loose T-Strap
(Masonry)

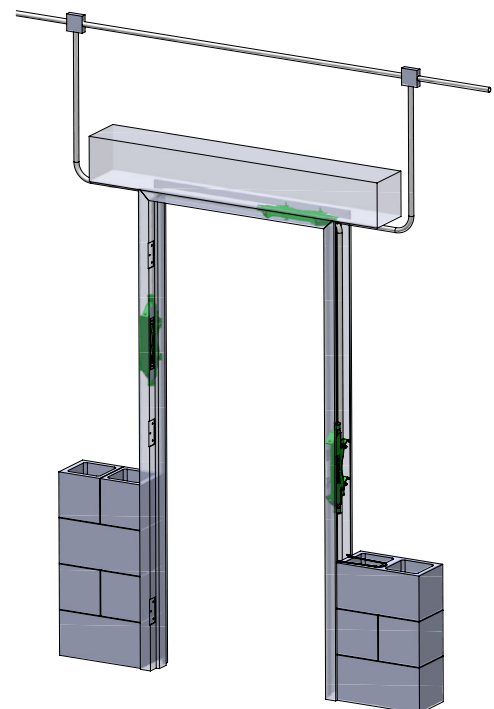


FrameFrog Preparation

1. Remove excess portion of Wing Tab (C) for corresponding depth of door frame, and discard excess.
2. Remove port caps (E) where conduit is to be connected. Use pliers or flathead screwdriver to pry cap off of port. Leave all other caps in place for connection by others in the field, and to prevent mortar from entering FrameFrog.
3. Tape or seal caps if needed to prevent high slump mortar from entering FrameFrog.
4. Remove triangular crackoff (F) where required for clearance with some door frame hardware prep (for example, EPT devices).

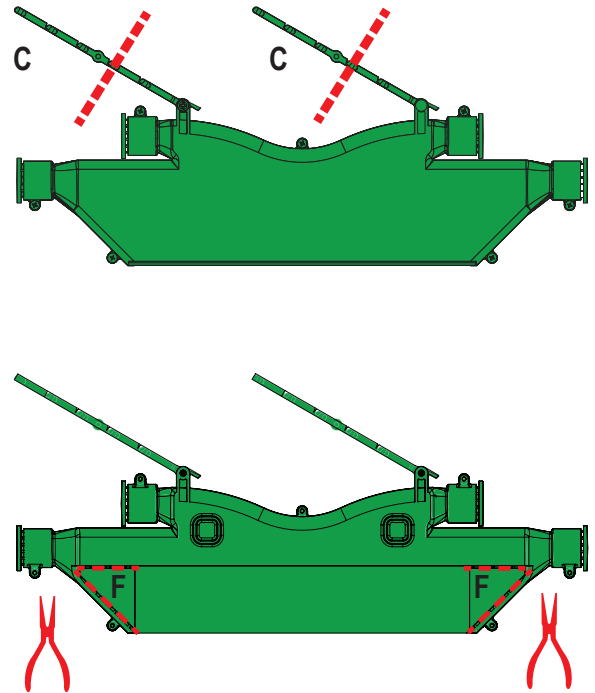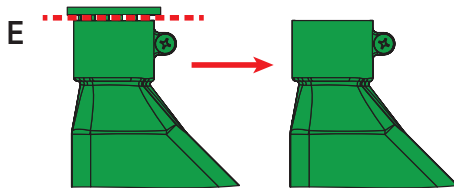


FrameFrog Installation

1. Insert FrameFrog by placing the tab under the back hem of the frame, and rotating down into the frame to cover the door hardware prep.
2. Once FrameFrog is in the door frame, slide into position where opening is centered on the hole in the door frame.
3. For units at the head of the frame, verify that Rear Port is set back approximately 3"- 4" from the outside corner of the frame. This may require removal of one of the triangular knockouts (F). When located properly, a standard sweep conduit will drop down into the side of the frame and avoid conflict with future construction.
4. Use a screw gun (or screw driver) to rotate wing tabs (C) under the opposite back hem of the frame. Continue screwing so that wing tab rises up tight to the back of the hem to lock the box in place.
5. Caution: DO NOT overtighten screws and tear plastic pilot hole of the wing tab. Use low speed, and stop once FrameFrog is tight.

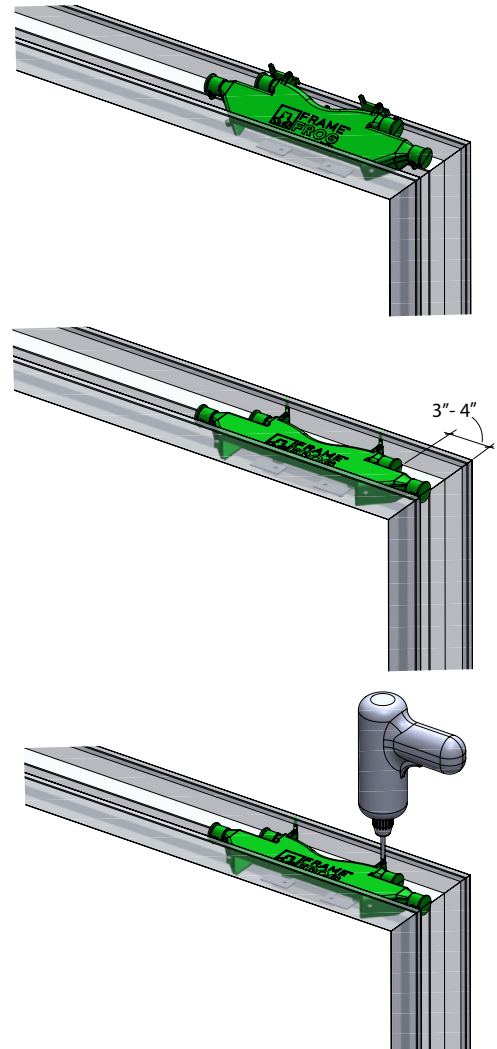


Wing Tab Additional Support

For door frames wider than 6 3/4", the Wing Tab contains a pilot hole for additional support by inserting a #6 screw as show. (Screws are not provided). For 7 3/4" frames, use 1 1/2" screw; for all others, use 2" long screws.

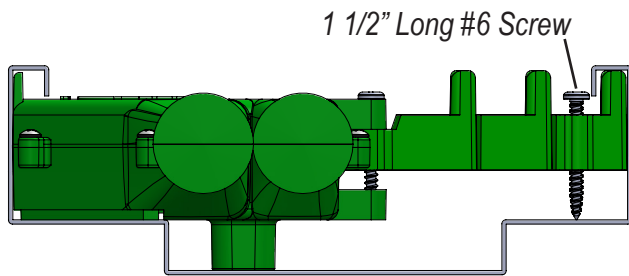

7 3/4" Wide Frame

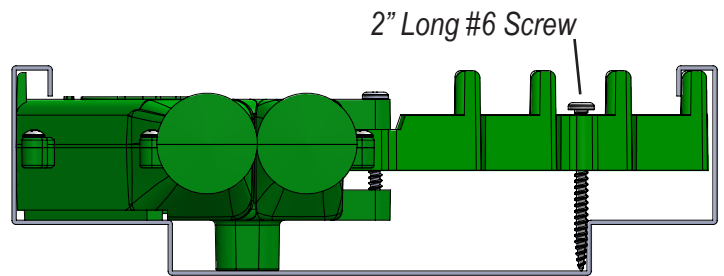


Frames Wider Than 7 3/4"

Connecting Electrical Metal Tubing (EMT)


Short 1/2"
PVC Conduit

Threaded
1/2" PVC
Connector

Threaded
1/2" EMT
Connector





PARTS NEEDED

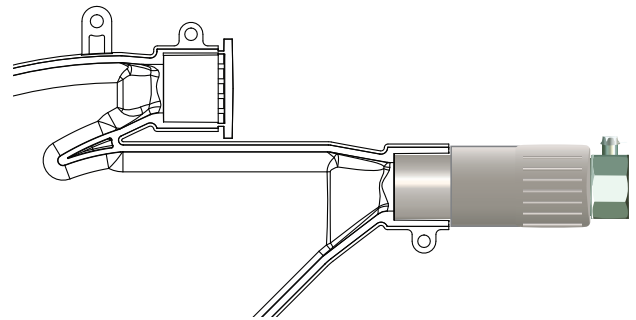

PARTS ASSEMBLED


Recommended Conduit Configuration

While there are multiple conduit configurations available, we recommend using a consist convention of pathways such as the basic configuration demonstrated here. This will prove to be beneficial when running wires at the time when FrameFrog and conduits are concealed from view. By connecting **Port B** to **Port B**, you will know that these pathways remain within the door frame. This reserves **Port A** for exiting the frame and extending to various remote locations, such as card readers, above ceiling power supplies, etc..

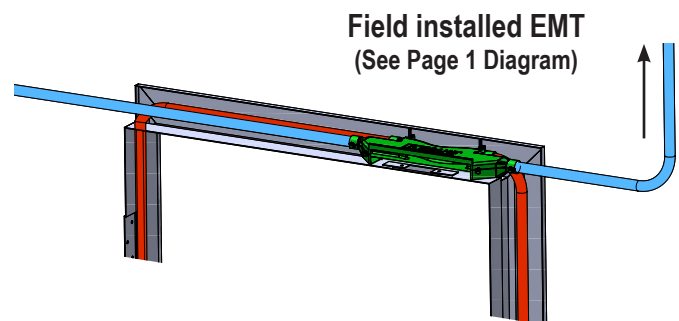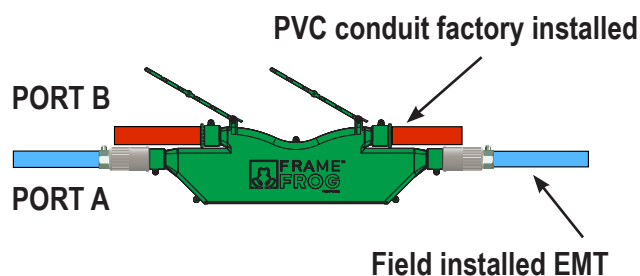


FrameFrog Use

1. Once door frame, FrameFrog, and walls are all in place, an electrician's fish-tape can be used to fish and pull wires from any location in the frame. Insert fish-tape into opening of frame and FrameFrog, and direct fish-tape side to side to enter the desired port and conduit.
2. It is highly recommended to use a fiberglass fish-tape. Flat metal fish-tapes do not bend equally in all directions, and can reduce the ability to control the fish-tape's path.
3. When pushing a fish-tape through a FrameFrog to a location further downstream, the fish-tape will naturally enter Port A and exit the frame. In order to direct the fish-tape to enter Port B and remain in the frame, simply use index finger to push the fish-tape behind the diverter, and continue pushing.

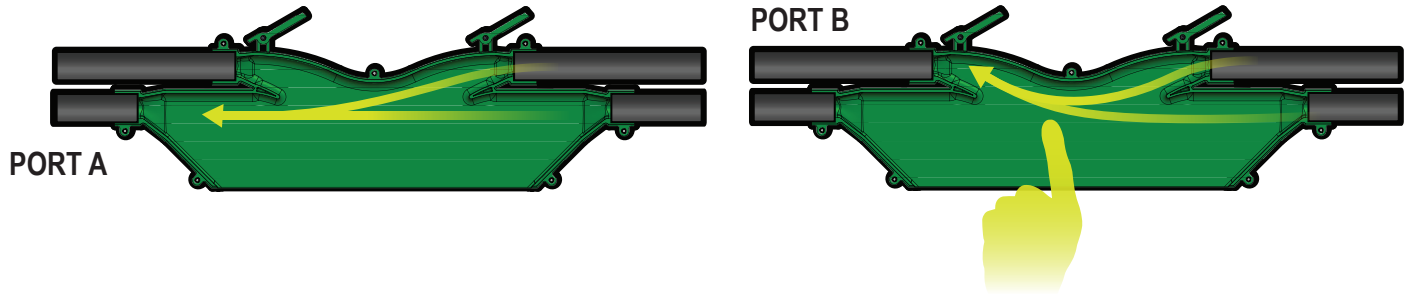


Door Frame QR Code Label Location

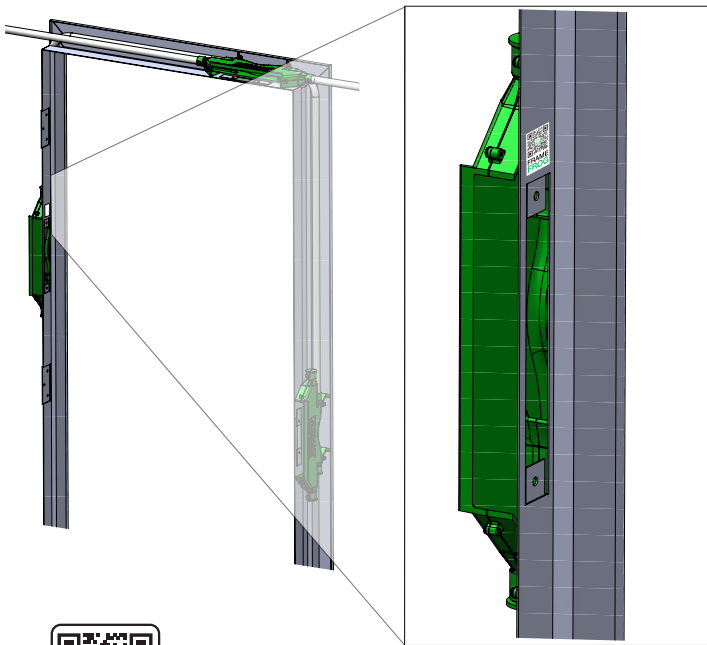

Apply QR Code Decal
on Hinge Side at Face
of Door Rabbet

⚠ Cautions

1. FrameFrog should be used in conjunction with a qualified electrician.
2. Tape or otherwise seal all openings of the remaining port caps to keep high slump mortar from entering FrameFrog.
3. Once installed in the frame, fill all voids between FrameFrog and the door frame that might allow high slump mortar to enter.
4. When attaching pvc conduit to FrameFrog, use Multipurpose Adhesive made for bonding PVC to ABS Plastic.
5. FrameFrog should only be used for wiring systems of less than 30 volts.
6. Limited for "Class 2 Single Source" power supplies only.
7. Convert conduits that exit the frame to EMT when required by codes.
8. Comply with all authorities having jurisdiction as well as all National, State, and Local Building Codes.

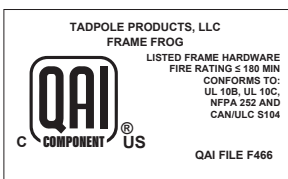

Tadpole Products LLC
223 Fairview Ave Bellevue KY, 41073
tadpoleproducts.org

US Patent and Trademark Office
Patent Nos. 10,411,447 & 10,855,064