

FRAMEFROG™ 4-PORT LONG



NEW & IMPROVED NOW PROVIDED WITH WELD CLIPS



Wing Tabs are still available and sold separately for use in field installation.

TADPOLE PRODUCTS, LLC
FRAME FROG

LISTED FRAME HARDWARE
FIRE RATING 5-120 MIN
CONFORMS TO:
UL 10B, UL 10C,
NFPA 552 AND
CAN/ULC S104

QAI
COMPONENT[®] US

QAI FILE F466


MODEL: FRG4L

The first backbox specifically designed for electrified door hardware in hollow metal door frames now comes with weld clips for shop installation just like the short.



PATHWAY CONFIGURATION

Four connection ports with removable caps provide flexibility for configuring conduit pathways in a variety of arrangements, and the patented funnel shaped ports smoothly steer a fish tape into your desired path.

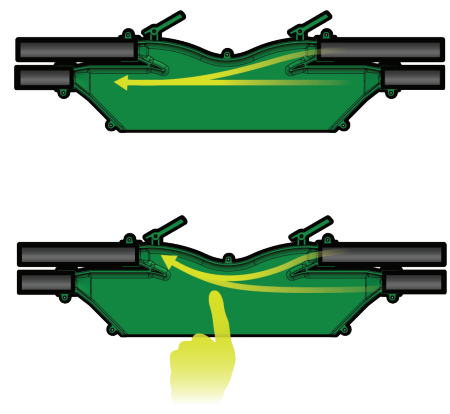


FRAMEFROG™ 4-PORT LONG

FrameFrog's universal design offers an easy method of installing conduit in door frames for electronic locks, strikes, card readers and other typical devices of a wired access control system.


KEY FEATURES

SIZES

The versatile FRG4L can be used in any frame location including electric power transfers up to 9" long.

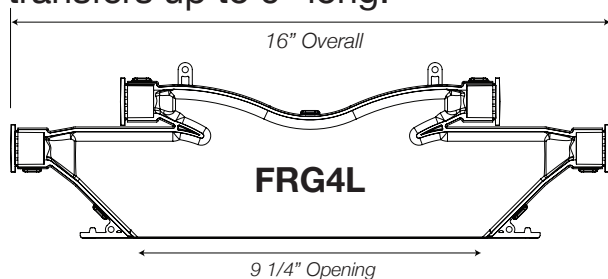


Model FRG4S is designed for all hardware preps in a door frame up to 5" long.



FUTURE PROOF DESIGN

The pathways remain accessible even after construction is complete.

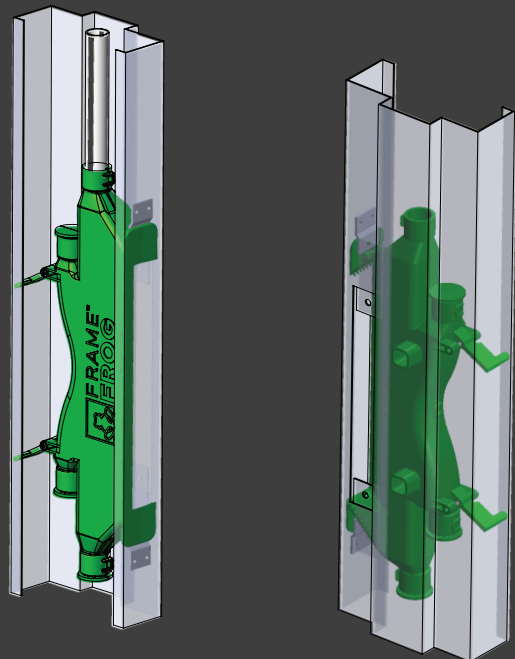

INSTALLATION

Shop weld to the frame with included weld clips or use wing tabs for field installation (sold separately).

FrameFrog is designed for use with 1/2" PVC conduit and standard 90° sweeps that fit around the corner of a 2" frame.

